


K74FL

Description

Strainer with stainless steel screen, epoxy painted.

Technical data

Max. working conditions with water

- Max. working temperature: 120 °C
- Nominal pressure: 16 bar
- Max. working pressure (continuous): 11 bar

Applicable EU Directives

- Fluids of use: group 1 & 2 - liquid and gases (2014/68/EU PED)


Materials

- Body: cast iron (GG 25)
- Screen: stainless steel
- Cover: cast iron (GG 25)
- Gasket: EPDM
- Plug: ductile iron
- Bolt: carbon steel

Versions and product codes

Product code	Size	New weight [kg]
K74FLY005	DN50	8,26
K74FLY006	DN65	10,00
K74FLY008	DN80	13,00
K74FLY010	DN100	17,50
K74FLY012	DN125	25,00
K74FLY015	DN150	34,00
K74FLY020	DN200	56,00
K74FLY025	DN250	175,00
K74FLY030	DN300	225,00

Dimensions

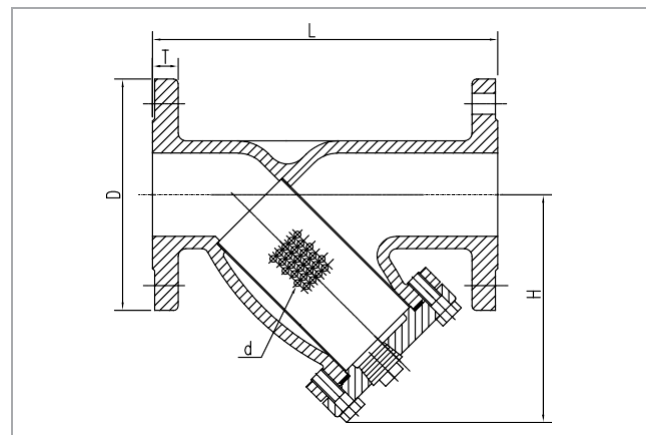

Product code	Size	L [mm]	H [mm]	D [mm]	T [mm]	d [mm]	Plug (BSPT)
K74FLY005	DN50	230	130	165	17	Ø 1,5	1/2"
K74FLY006	DN65	290	156	185	17	Ø 1,5	1"
K74FLY008	DN80	310	172	200	17	Ø 1,5	1"
K74FLY010	DN100	350	215	220	17	Ø 3	1"
K74FLY012	DN125	400	240	250	17	Ø 3	1 1/4"
K74FLY015	DN150	480	282	285	17	Ø 3	1 1/2"
K74FLY020	DN200	600	335	340	18	Ø 3	1 1/2"
K74FLY025	DN250	730	460	400	20	Ø 3	2"
K74FLY030	DN300	850	515	455	22,5	Ø 3	2"